




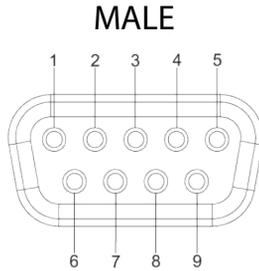

Terminal Block Breakout Board (DIY Set)

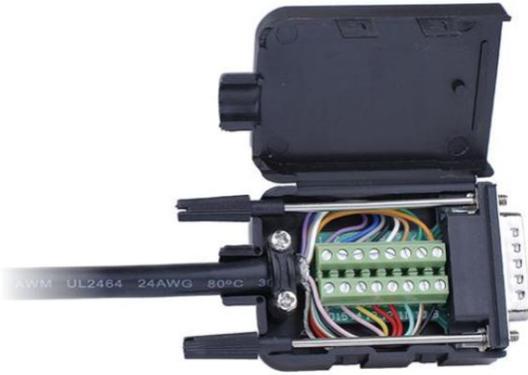

- 1 DCD (Data Carrier Detect)
- 2 RXD (Received Data)
- 3 TXD (Transmitted Data)
- 4 DTR (Data Terminal Ready)
- 5 GND (Signal Ground)
- 6 DSR (Data Send Ready)
- 7 RTS (Request to Send)
- 8 CTS (Clear to Send)
- 9 RI (Ring Indicator)

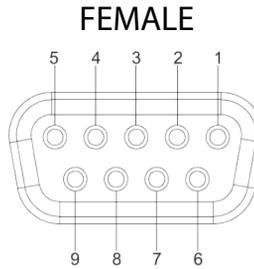

Material

- Housing: PP
- Connector Insulator: PBT+30%GF (UL94V-0)
- Contact: Brass
- Contact Plating: Nickel
- Connector Shell Plating: Cu60μ/Ni100-120μ

Technical

- Contact Current Rating: 5A max.
- Insulation Resistance: 1000MΩ min. at 500 V/DC
- Dielectric Withstanding Voltage: 500 V/AC(R.M.S)/1 min.
- Operating Temperature: -20~80°C

Housing Dimension



515-6-9111
9 pin D-SUB Male Connector
with locking screw



515-6-9113
9 pin D-SUB Male Connector
With jackscrew nut



515-6-9112
9 pin D-SUB Female Connector
with locking screw



515-6-9114
9 pin D-SUB Female Connector
With jackscrew nut