

www.computace.com


COMPUTACE ELECTRONIC COMPANY LIMITED

NO.6 GUANGKOU ROAD, HENGLI TOWN,
DONGGUAN CITY, GUANGDONG, CHINA
info@computace.com



Terminal Connectors

Computace Electronic Co., Ltd.
www.computace.com

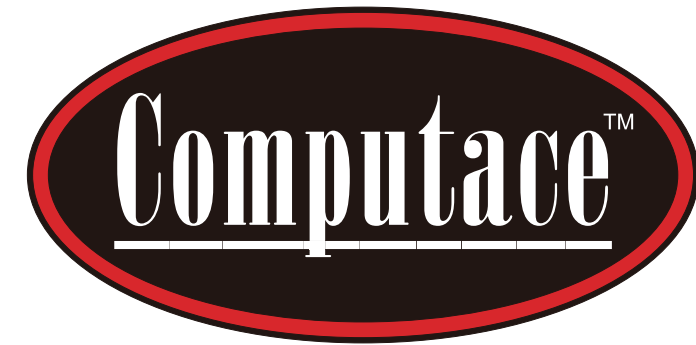

www.computace.com

» Company Profile

Computace Electronic Company Limited is an established company, specializing in development and manufacturing of computer and electrical components such as Board-to-Board connectors, Header connectors, Housing Wafer terminals, USB/DVI/HDMI connectors, Terminal adapters and various type of cooling fans for computers and industrial equipment application.


Computace not only maintains its own manufacturing facility but also has close partnerships with other reputable components manufacturers and is able to leverage on multiple collective key resources in R&D as well as in production area. Computace manufactures, markets and distributes its products worldwide. Besides OBM, Computace also offers a professional support to its committed customers in OEM and ODM productions.



Vinyl Pre-Insulated Crimp Terminals

Vinyl Insulated Ring Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Red**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **22-16 A.W.G / 0.5-1.5mm²**



Part-no.	D1	D	L1	L
RV052455	2.4 mm	5.5 mm	5 mm	17.6 mm
RV053255	3.2 mm	5.5 mm	5 mm	17.5 mm
RV053755	3.7 mm	5.5 mm	5 mm	17.5 mm
RV053766	3.7 mm	6.6 mm	6.3 mm	19.6 mm
RV053780	3.7 mm	8 mm	7 mm	21 mm
RV054366	4.3 mm	6.6 mm	6.3 mm	19.6 mm
RV054380	4.3 mm	8 mm	7 mm	21 mm
RV055380	5.3 mm	8 mm	7 mm	21 mm
RV055312	5.3 mm	11.6 mm	11 mm	26.7 mm
RV056412	6.4 mm	11.6 mm	11 mm	26.7 mm
RV058412	8.4 mm	11.6 mm	11 mm	26.7 mm
RV051014	10 mm	14 mm	14.5 mm	31 mm
RV051319	13 mm	19 mm	16 mm	35.4 mm
RV051327	13 mm	27 mm	21 mm	44.3 mm
RV051727	17 mm	27 mm	21 mm	44.3 mm
RV052127	21 mm	27 mm	21 mm	44.3 mm

Vinyl Insulated Ring Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Blue**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **16-14 A.W.G / 1.5-2.5mm²**



Part-no.	D1	D	L1	L
RV152455	2.4 mm	5.5 mm	4.8 mm	18 mm
RV153266	3.2 mm	6.6 mm	6.3 mm	19.6 mm
RV153766	3.7 mm	6.6 mm	6.3 mm	19.6 mm
RV153780	3.7 mm	8 mm	7 mm	21 mm
RV154366	4.3 mm	6.6 mm	6.3 mm	19.4 mm
RV154380	4.3 mm	8 mm	7 mm	21 mm
RV155380	5.3 mm	8 mm	7 mm	21 mm
RV155395	5.3 mm	9.5 mm	7.3 mm	21.8 mm
RV156412	6.4 mm	11.6 mm	11 mm	26.7 mm
RV158412	8.4 mm	11.6 mm	11 mm	26.7 mm
RV151014	10 mm	14 mm	14.5 mm	31 mm
RV151119	10 mm	19.2 mm	16 mm	35.6 mm
RV151319	13 mm	19.2 mm	16 mm	35.4 mm
RV151527	15 mm	27 mm	21 mm	44.3 mm
RV151727	17 mm	27 mm	21 mm	44.3 mm
RV152127	21 mm	27 mm	21 mm	44.3 mm

Vinyl Insulated Ring Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Black**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **14-12 A.W.G / 2.5-4.0mm²**



Part-no.	D1	D	L1	L
RV254380	4.3 mm	8 mm	7.7 mm	24.5 mm
RV255380	5.3 mm	8 mm	7.7 mm	24.5 mm
RV255395	5.3 mm	9.5 mm	8.3 mm	25.5 mm
RV255312	5.3 mm	12 mm	7.7 mm	27.9 mm
RV256412	6.4 mm	12 mm	7.7 mm	27.9 mm
RV258415	8.4 mm	15 mm	13.5 mm	32 mm
RV251015	10 mm	15 mm	13.5 mm	32 mm

Vinyl Insulated Ring Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Yellow**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **12-10 A.W.G / 4.0-6.0mm²**



Part-no.	D1	D	L1	L
RV403272	3.2 mm	7.2 mm	6.1 mm	22.7 mm
RV403772	3.7 mm	7.2 mm	6.1 mm	22.7 mm
RV404372	4.3 mm	7.2 mm	6.1 mm	22.7 mm
RV404395	4.3 mm	9.5 mm	8.3 mm	25.8 mm
RV405395	5.3 mm	9.5 mm	8.3 mm	25.8 mm
RV406412	6.4 mm	12 mm	10.5 mm	29 mm
RV408415	8.4 mm	15 mm	13.5 mm	34.2 mm
RV401015	10 mm	15 mm	13.5 mm	34.2 mm
RV401019	10 mm	19 mm	16 mm	38.5 mm
RV401319	13 mm	19 mm	16 mm	38.5 mm
RV401532	15 mm	32 mm	25.2 mm	54.2 mm
RV401732	17 mm	32 mm	25.2 mm	54.2 mm
RV402132	21 mm	32 mm	25.2 mm	54.2 mm

Vinyl Insulated Fork Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Red**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **22-16 A.W.G / 0.5-1.5mm²**



Part-no.	D1	W	L1	L
FV053257	3.2 mm	5.7 mm	6.5 mm	19.4 mm
FV053757	3.7 mm	5.7 mm	6.5 mm	19.4 mm
FV053764	3.7 mm	6.4 mm	6.5 mm	19.7 mm
FV054364	4.3 mm	6.4 mm	6.5 mm	19.7 mm
FV054372	4.3 mm	7.2 mm	6.5 mm	20 mm
FV055395	5.3 mm	9.5 mm	6.5 mm	17.3 mm
FV056495	6.4 mm	9.5 mm	6.5 mm	17.3 mm
FV056411	6.4 mm	11 mm	11 mm	26.5 mm

Vinyl Insulated Fork Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Blue**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **16-14 A.W.G / 1.5-2.5mm²**



Part-no.	D1	W	L1	L
FV153260	3.2 mm	6 mm	6.5 mm	19.5 mm
FV153760	3.7 mm	6 mm	6.5 mm	19.5 mm
FV153764	3.7 mm	6.4 mm	6.5 mm	19.7 mm
FV153772	3.7 mm	7.2 mm	6.5 mm	20.1 mm
FV154364	4.3 mm	6.4 mm	6.5 mm	19.7 mm
FV154372	4.3 mm	7.2 mm	6.5 mm	20.1 mm
FV154380	4.3 mm	8 mm	6.5 mm	20.5 mm
FV155380	5.3 mm	8 mm	6.5 mm	20.5 mm
FV155395	5.3 mm	9.5 mm	6.5 mm	21.3 mm
FV156495	6.4 mm	9.5 mm	6.5 mm	21.3 mm
FV156411	6.4 mm	11 mm	11 mm	26.5 mm

Vinyl Insulated Fork Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Black**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **14-12 A.W.G / 2.5-4.0mm²**



Part-no.	D1	W	L1	L
FV253780	3.7 mm	8 mm	7 mm	24.8 mm
FV254380	4.3 mm	8 mm	7 mm	24.8 mm
FV255380	5.3 mm	8 mm	7 mm	24.8 mm
FV256412	6.4 mm	12 mm	9.1 mm	28 mm

Vinyl Insulated Fork Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Yellow**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **12-10 A.W.G / 4.0-6.0mm²**



Part-no.	D1	W	L1	L
FV403258	3.2 mm	5.8 mm	7 mm	23.4 mm
FV403764	3.7 mm	6.4 mm	7.5 mm	24.2 mm
FV404372	4.3 mm	7.2 mm	7.5 mm	24.2 mm
FV405395	5.3 mm	9.5 mm	8 mm	26.3 mm
FV406495	6.4 mm	9.5 mm	8 mm	26.3 mm
FV406412	6.4 mm	12 mm	12 mm	31.5 mm
FV408414	8.4 mm	14 mm	14.5 mm	34.5 mm
FV401018	10 mm	18 mm	14.5 mm	37 mm

Vinyl Insulated Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Yellow**
Terminal Material - Copper
Terminal Thickness - 0.5mm
Temperature rating - 75°C max.
Wire Range - **26-22 A.W.G / 0.2-0.5mm²**



Part-no.
BV021580

Vinyl Insulated Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Red**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **22-16 A.W.G / 0.5-1.5mm²**



Part-no.	W	L1	L2	L
BV052018	2 mm	18 mm	10 mm	28 mm
BV052310	2.3 mm	10 mm	10 mm	20 mm
BV052518	2.5 mm	18 mm	10 mm	28 mm
BV053011	3 mm	11 mm	10 mm	22 mm
BV053014	3 mm	14 mm	10 mm	24 mm

Vinyl Insulated Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Blue**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **16-14 A.W.G / 1.5-2.5mm²**



Part-no.	W	L1	L2	L
BV152018	2 mm	18 mm	11 mm	28 mm
BV152410	2.4 mm	10 mm	11 mm	20 mm
BV152414	2.4 mm	14 mm	11 mm	24 mm
BV152418	2.4 mm	18 mm	11 mm	28 mm
BV152810	2.8 mm	10 mm	11 mm	20 mm
BV152818	2.8 mm	18 mm	11 mm	28 mm
BV153013	3 mm	13 mm	11 mm	23 mm
BV153018	3 mm	18 mm	11 mm	28 mm

Vinyl Insulated Blade Terminal

Insulation Material - Vinyl (PVC)
Insulation Color - **Yellow**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **12-10 A.W.G / 4.0-6.0mm²**




Part-no.	W	L1	L2	L
BV402018	2 mm	18 mm	13 mm	30.5 mm
BV402810	2.8 mm	10 mm	13 mm	22.5 mm
BV404014	4 mm	14 mm	13 mm	26.5 mm
BV404513	4.5 mm	13 mm	13 mm	25.5 mm
BV404518	4.5 mm	18 mm	13 mm	30.5 mm

Multiple-Stud Ring Terminals

Stud Range 3.7 - 5.3mm


Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range -
(Red)22-16 A.W.G / 0.5-1.5mm²
(Blue)16-14 A.W.G / 1.5-2.5mm²
(Yellow)12-10 A.W.G / 4.0-6.0mm²

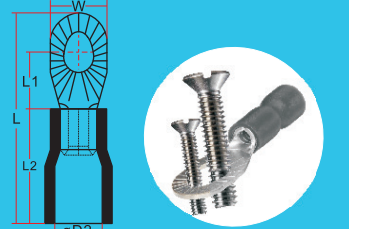

Part-no.	W	L1	L2	L	D2	color
MRV053753	8.6 mm	7.9 mm	10 mm	24.3 mm	4 mm	Red
MRV153753	8.6 mm	7.9 mm	11 mm	24.3 mm	4.5 mm	Blue
MRV403753	9.9 mm	8.9 mm	13 mm	29.3 mm	6.5 mm	Yellow

Vinyl Insulated Flange Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Red**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **22-16 A.W.G / 0.5-1.5mm²**



Part-no.	D1	W	L1	L
FSV053275	3.2 mm	7.5 mm	5.1 mm	19 mm
FSV053264	3.2 mm	6.4 mm	5.1 mm	19 mm
FSV053764	3.7 mm	6.4 mm	5.1 mm	19 mm
FSV053775	3.7 mm	7.5 mm	5.1 mm	19 mm
FSV053785	3.7 mm	8.5 mm	7.2 mm	24.5 mm
FSV054375	4.3 mm	7.5 mm	5.1 mm	19 mm
FSV054385	4.3 mm	8.5 mm	7.2 mm	24.5 mm
FSV055375	5.3 mm	7.5 mm	5.1 mm	19 mm
FSV055385	5.3 mm	8.5 mm	7.2 mm	24.5 mm

Vinyl Insulated Flange Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Blue**
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - **16-14 A.W.G / 1.5-2.5mm²**



Part-no.	D1	W	L1	L
FSV153775	3.7 mm	7.5 mm	5.2 mm	19.5 mm
FSV153785	3.7 mm	8.5 mm	7.2 mm	23 mm
FSV154375	4.3 mm	7.5 mm	5.2 mm	19.5 mm
FSV154380	4.3 mm	8 mm	6.8 mm	23.5 mm
FSV154385	4.3 mm	8.5 mm	7.2 mm	23 mm
FSV155375	5.3 mm	7.5 mm	5.2 mm	19.5 mm
FSV155385	5.3 mm	8.5 mm	7.2 mm	23 mm

Vinyl Insulated Flange Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - **Yellow**
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - **12-10 A.W.G / 4.0-6.0mm²**



Part-no.	D1	D	L1	L
FSV403285	3.2 mm	8.5 mm	7.5 mm	25.5 mm
FSV403776	3.7 mm	7.6 mm	6.2 mm	25.5 mm
FSV403785	3.7 mm	8.5 mm	7.5 mm	27 mm
FSV404376	4.3 mm	7.6 mm	6.2 mm	25.5 mm
FSV404385	4.3 mm	8.5 mm	7.5 mm	27 mm
FSV405376	5.3 mm	7.6 mm	6.2 mm	25.5 mm
FSV405385	5.3 mm	8.5 mm	7.5 mm	27 mm

Vinyl Insulated Lipped Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	W	L1	L2	L
LBV053017	3 mm	17.2 mm	10 mm	27.2 mm
LBV054617	4.6 mm	17.2 mm	10 mm	27.2 mm

Vinyl Insulated Lipped Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	W	L1	L2	L
LBV153017	3 mm	17.2 mm	11 mm	28.2 mm
LBV154617	4.6 mm	17.2 mm	11 mm	28.2 mm

Vinyl Insulated Lipped Blade Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	W	L1	L2	L
LBV403017	3 mm	17.2 mm	13 mm	30.2 mm
LBV404617	4.6 mm	17.2 mm	13 mm	30.2 mm

Vinyl Insulated PIN Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	W	L1	L2	L
PV051909	1.9 mm	9 mm	10 mm	19 mm
PV051910	1.9 mm	10 mm	10 mm	20 mm
PV051912	1.9 mm	12 mm	10 mm	22 mm
PV051913	1.9 mm	13 mm	10 mm	23 mm
PV051914	1.9 mm	14 mm	10 mm	24 mm
PV051916	1.9 mm	16 mm	10 mm	26 mm

Vinyl Insulated PIN Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	W	L1	L2	L
PV151909	1.9 mm	9 mm	11 mm	20 mm
PV151910	1.9 mm	10 mm	11 mm	21 mm
PV151913	1.9 mm	13 mm	11 mm	24 mm
PV151916	1.9 mm	16 mm	11 mm	27 mm

Vinyl Insulated PIN Terminal

Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 0.5mm
Temperature rating - 75°C max.
Wire Range - 26-22 A.W.G / 0.2-0.5mm²




Part-no.	W	L1	L2	L
PV021410	0.2 mm	0.5 mm	0.2 mm	0.5 mm

Insulated Crimp Terminals

Vinyl Insulated PIN Terminal

Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no. PV402814

Internal Tooth Lock Washer Ring Terminal

Toothed Lock Ring Terminal help achieve tight assemblies which helps prevent components from loosening under vibration or corrosion.


Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.



Part-no.	D1	D	color	wire range
TLV053795	3.7 mm	4.0 mm	Red	22-16A.W.G / 0.5-1.5mm ²
TLV054395	4.3 mm	4.0 mm	Red	22-16A.W.G / 0.5-1.5mm ²
TLV055195	5.1 mm	4.0 mm	Red	22-16A.W.G / 0.5-1.5mm ²
TLV153795	3.7 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
TLV154395	4.3 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
TLV155195	5.1 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²

Vinyl Insulated Hook Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	W	L1	L
HV053780	3.7 mm	8 mm	7 mm	21 mm
HV054380	4.3 mm	8 mm	7 mm	21 mm
HV055380	5.3 mm	8 mm	7 mm	21 mm
HV056412	6.4 mm	11.6 mm	11 mm	26.7 mm

Vinyl Insulated Hook Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	W	L1	L
HV153785	3.7 mm	8.5 mm	7.8 mm	22 mm
HV154385	4.3 mm	8.5 mm	7.8 mm	22 mm
HV155395	5.3 mm	9.5 mm	7.3 mm	22 mm
HV156412	6.4 mm	12 mm	11 mm	27.7 mm

Vinyl Insulated Hook Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	W	L1	L
HV403772	3.7 mm	7.2 mm	7.2 mm	22.7 mm
HV404395	4.3 mm	9.5 mm	9.5 mm	25.8 mm
HV405395	5.3 mm	9.5 mm	9.5 mm	25.8 mm
HV406412	6.4 mm	12 mm	10.3 mm	29 mm
HV408415	8.4 mm	15 mm	13.5 mm	34.2 mm

Vinyl Insulated Locking Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	D	L1	L
LV053764	3.7 mm	6.4 mm	6.5 mm	21 mm
LV054372	4.3 mm	7.2 mm	6.5 mm	21 mm
LV054364	4.3 mm	6.4 mm	6.5 mm	21 mm
LV055381	5.3 mm	8.1 mm	6.5 mm	21 mm
LV055395	5.3 mm	9.5 mm	6.5 mm	21 mm

Vinyl Insulated Locking Terminal


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	D	L1	L
LV153760	3.7 mm	6 mm	6.5 mm	22 mm
LV154372	4.3 mm	7.2 mm	6.5 mm	22 mm
LV154381	4.3 mm	8.1 mm	6.5 mm	22 mm
LV155381	5.3 mm	8.1 mm	6.5 mm	22 mm
LV155393	5.3 mm	9.3 mm	6.5 mm	22 mm

Vinyl Insulated Locking Terminal

Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	D	L1	L
LV403783	3.7 mm	8.3 mm	7 mm	25.2 mm
LV404383	4.3 mm	8.3 mm	7 mm	25.2 mm
LV405309	5.3 mm	9 mm	7 mm	25.2 mm
LV406412	6.4 mm	12 mm	12 mm	31.5 mm

Vinyl Insulated 3-way Terminal


Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.



Part-no.	L	D	color	wire range
RV3054080	17 mm	4 mm	Red	22-16A.W.G / 0.5-1.5mm ²
RV3154080	18 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
RV3404080	22 mm	6.5 mm	Yellow	12-10A.W.G / 4.0-6.0mm ²

Vinyl Insulated 4-way Terminal

Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.

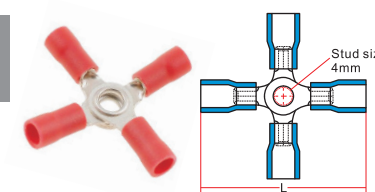

Part-no.	L	D	color	wire range
RV4054080	34 mm	4 mm	Red	22-16A.W.G / 0.5-1.5mm ²
RV4154080	35.5 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
RV4404080	43.5 mm	6.5 mm	Yellow	12-10A.W.G / 4.0-6.0mm ²


Other stud size customized are available upon request!

Insulated Crimp Terminals

Nylon pre-Insulated Crimp Terminal

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	D	L1	L
RN053255	3.2 mm	5.5 mm	5 mm	18 mm
RN053755	3.7 mm	5.5 mm	5 mm	18 mm
RN053766	3.7 mm	6.6 mm	6.3 mm	20 mm
RN053780	3.7 mm	8 mm	7 mm	21.5 mm
RN054366	4.3 mm	6.6 mm	6.3 mm	20 mm
RN054380	4.3 mm	8 mm	7 mm	21.5 mm
RN055380	5.3 mm	8 mm	7 mm	21.5 mm
RN055312	5.3 mm	11.6 mm	11 mm	27.2 mm
RN056412	6.4 mm	11.6 mm	11 mm	27.2 mm
RN058412	8.4 mm	11.6 mm	11 mm	27.2 mm
RN051014	10 mm	14 mm	14.5 mm	32 mm
RN051320	13 mm	19 mm	16 mm	36.4 mm
RN051527	15 mm	27 mm	21 mm	45.3 mm
RN051727	17 mm	27 mm	21 mm	45.3 mm
RN052127	21 mm	27 mm	21 mm	45.3 mm

Nylon Insulated Ring Terminal

Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	D	L1	L
RN153266	3.2 mm	6.6 mm	6.3 mm	20.6 mm
RN153766	3.7 mm	6.6 mm	6.3 mm	20.6 mm
RN153780	3.7 mm	8 mm	7 mm	22 mm
RN154366	4.3 mm	6.6 mm	6.3 mm	20.6 mm
RN154380	4.3 mm	8 mm	7 mm	22 mm
RN154395	4.3 mm	9.5 mm	7.3 mm	22.8 mm
RN155380	5.3 mm	8 mm	7 mm	22 mm
RN156412	6.4 mm	11.6 mm	11.6 mm	27.7 mm
RN158412	8.4 mm	11.6 mm	11.6 mm	27.7 mm
RN151014	10 mm	14 mm	14.5 mm	32 mm
RN151319	13 mm	19.2 mm	16 mm	36.4 mm
RN151527	15 mm	27 mm	21 mm	45.3 mm
RN151727	17 mm	27 mm	21 mm	45.3 mm
RN152127	21 mm	27 mm	21 mm	45.3 mm

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	D	L1	L
RN403272	3.2 mm	7.2 mm	6.1 mm	23.2 mm
RN403772	3.7 mm	7.2 mm	6.1 mm	23.2 mm
RN404372	4.3 mm	7.2 mm	6.1 mm	23.2 mm
RN404395	4.3 mm	9.5 mm	8.3 mm	26.3 mm
RN405395	5.3 mm	9.5 mm	8.3 mm	26.3 mm
RV406412	6.4 mm	12 mm	10.5 mm	29.5 mm
RN408415	8.4 mm	15 mm	13.5 mm	34.7 mm
RN401015	10 mm	15 mm	13.5 mm	34.7 mm
RN401319	13 mm	19 mm	16 mm	39 mm
RN401532	15 mm	32 mm	25.2 mm	54.2 mm
RN401732	17 mm	32 mm	25.2 mm	54.2 mm
RN402132	21 mm	32 mm	25.2 mm	54.2 mm

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 1.2mm
Temperature rating - 105°C max.
Wire Range - 8 A.W.G / 8mm²



Part-no.	D1	D	L1	L
RN803780	3.7 mm	8 mm	9.3 mm	29 mm
RN804380	4.3 mm	8 mm	9.3 mm	29 mm
RN804312	4.3 mm	12 mm	9.3 mm	31.3 mm
RN805312	5.3 mm	12 mm	9.3 mm	31.3 mm
RN805315	5.3 mm	15 mm	13.8 mm	37.3 mm
RN806412	6.4 mm	12 mm	9.3 mm	31.3 mm
RN806415	6.4 mm	15 mm	13.8 mm	37.3 mm
RN808415	8.4 mm	15 mm	13.8 mm	37.3 mm
RN801015	10 mm	15 mm	13.8 mm	37.3 mm
RN801320	13 mm	20 mm	15 mm	41 mm

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 1.5mm
Temperature rating - 105°C max.
Wire Range - 6 A.W.G / 14mm²



Part-no.	D1	D	L1	L
RN144312	4.3 mm	12 mm	13.3 mm	40.8 mm
RN145312	5.3 mm	12 mm	13.3 mm	40.8 mm
RN146412	6.4 mm	12 mm	13.3 mm	40.8 mm
RN146416	6.4 mm	16 mm	14.2 mm	43.5 mm
RN148416	8.4 mm	16 mm	14.2 mm	43.5 mm
RN141016	10 mm	16 mm	14.2 mm	43.5 mm
RN141222	11.5 mm	22 mm	19.8 mm	52 mm
RN141322	13 mm	22 mm	19.8 mm	52 mm

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.7mm
Temperature rating - 105°C max.
Wire Range - 4 A.W.G / 22mm²



Part-no.	D1	D	L1	L
RN224313	4.3 mm	12.2 mm	15.1 mm	45.2 mm
RN225313	5.3 mm	12.2 mm	15.1 mm	45.2 mm
RN225317	5.3 mm	16.5 mm	13.5 mm	45.5 mm
RN226413	6.4 mm	12.2 mm	15.1 mm	45.2 mm
RN226417	6.4 mm	16.5 mm	13.5 mm	45.5 mm
RN228417	8.4 mm	16.5 mm	13.5 mm	45.5 mm
RN221017	10 mm	16.5 mm	13.5 mm	45.5 mm
RN221322	13 mm	22 mm	19.7 mm	54.5 mm

Nylon Insulated Ring Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 1.8mm
Temperature rating - 105°C max.
Wire Range - 2 A.W.G / 38mm²



Part-no.	D1	D	L1	L
RN385316	5.3 mm	15.3 mm	17.4 mm	52 mm
RN386416	6.4 mm	15.3 mm	17.4 mm	52 mm
RN386422	6.4 mm	22 mm	17.7 mm	55.7 mm
RN388416	8.4 mm	15.3 mm	17.4 mm	52 mm
RN388422	8.4 mm	22 mm	17.7 mm	55.7 mm
RN381016	10 mm	15.3 mm	17.4 mm	52 mm
RN381022	10 mm	22 mm	17.7 mm	55.7 mm
RN381222	11.5 mm	22 mm	17.7 mm	55.7 mm
RN381322	13 mm	22 mm	17.7 mm	55.7 mm

Nylon Insulated Fork Terminal

Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²

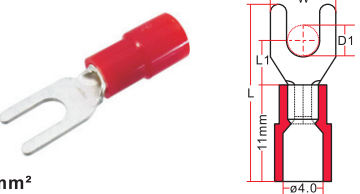

Part-no.	D1	W	L1	L
FN053257	3.2 mm	5.7 mm	6.5 mm	20 mm
FN053757	3.7 mm	5.7 mm	6.5 mm	20 mm
FN053764	3.7 mm	6.4 mm	6.5 mm	20 mm
FN054364	4.3 mm	6.4 mm	6.5 mm	20 mm
FN054372	4.3 mm	7.2 mm	6.5 mm	20 mm
FN055395	5.3 mm	9.5 mm	6.5 mm	17.8 mm
FN056495	6.4 mm	9.5 mm	6.5 mm	17.8 mm
FN056411	6.4 mm	11 mm	11 mm	27 mm

Nylon Insulated Fork Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	W	L1	L
FN153260	3.2 mm	6 mm	6.5 mm	20.5 mm
FN153760	3.7 mm	6 mm	6.5 mm	20.6 mm
FN153764	3.7 mm	6.4 mm	6.5 mm	20.6 mm
FN153772	3.7 mm	7.2 mm	6.5 mm	21 mm
FN154364	4.3 mm	6.4 mm	6.5 mm	20.6 mm
FN154372	4.3 mm	7.2 mm	6.5 mm	21 mm
FN154380	4.3 mm	8 mm	6.5 mm	21.5 mm
FN155380	5.3 mm	8 mm	6.5 mm	21.5 mm
FN155395	5.3 mm	9.5 mm	6.5 mm	22.3 mm
FN156495	6.4 mm	9.5 mm	6.5 mm	22.3 mm
FN156411	6.4 mm	11 mm	11 mm	27.5 mm

Nylon Insulated Fork Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²

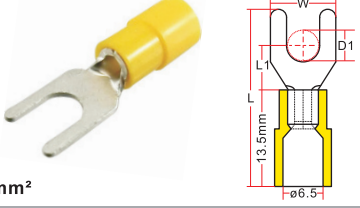

Part-no.	D1	W	L1	L
FN403258	3.2 mm	5.8 mm	7 mm	24 mm
FN403764	3.7 mm	6.4 mm	7.5 mm	24.7 mm
FN404372	4.3 mm	7.2 mm	7.5 mm	24.7 mm
FN405395	5.3 mm	9.5 mm	8 mm	26.8 mm
FN406495	6.4 mm	9.5 mm	8 mm	26.8 mm
FN406412	6.4 mm	12 mm	12 mm	32 mm
FN408414	8.4 mm	14 mm	14.5 mm	35 mm
FN401018	10 mm	18 mm	14.5 mm	37.5 mm

Nylon Insulated Fork Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 1.2mm
Temperature rating - 105°C max.
Wire Range - 8 A.W.G / 8mm²

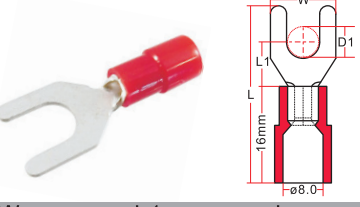

Part-no.	D1	W	L1	L
FN805311	5.3 mm	10.5 mm	8.1 mm	28.3 mm
FN806411	6.4 mm	10.8 mm	8.6 mm	30 mm

Nylon Insulated Fork Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 1.5mm
Temperature rating - 105°C max.
Wire Range - 6 A.W.G / 14mm²

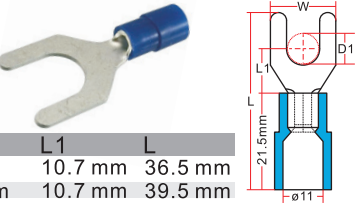

Part-no.	D1	W	L1	L
FN146411	6.4 mm	11 mm	10.7 mm	36.5 mm
FN148414	8.4 mm	13.8 mm	10.7 mm	39.5 mm

Nylon Insulated Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	W	L1	L2	L
BN052018	2 mm	18 mm	11 mm	29 mm
BN052310	2.3 mm	10 mm	11 mm	21 mm
BN052518	2.5 mm	18 mm	11 mm	29 mm
BN053011	3 mm	11 mm	11 mm	23 mm
BN053014	3 mm	14 mm	11 mm	25 mm

Nylon Insulated Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	W	L1	L2	L
BN152018	2 mm	18 mm	11 mm	29 mm
BN152410	2.4 mm	10 mm	11 mm	21 mm
BN152414	2.4 mm	14 mm	11 mm	25 mm
BN152418	2.4 mm	18 mm	11 mm	29 mm
BN152810	2.8 mm	10 mm	11 mm	21 mm
BN152818	2.8 mm	18 mm	11 mm	29 mm
BN153013	3 mm	13 mm	11 mm	24 mm
BN153018	3 mm	18 mm	11 mm	29 mm

Nylon Insulated Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	W	L1	L2	L
BN402018	2 mm	18 mm	13.5 mm	31.5 mm
BN402810	2.8 mm	10 mm	13.5 mm	23.5 mm
BN404014	4 mm	14 mm	13.5 mm	27.5 mm
BN404513	4.5 mm	13 mm	13.5 mm	26.5 mm
BN404518	4.5 mm	18 mm	13.5 mm	31.5 mm

Nylon Insulated Hook Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	W	L1	L
HN053780	3.7 mm	8 mm	7 mm	22 mm
HN054380	4.3 mm	8 mm	7 mm	22 mm
HN055380	5.3 mm	8 mm	7 mm	22 mm
HN056412	6.4 mm	11.6 mm	11 mm	27.8 mm

Nylon Insulated Hook Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	W	L1	L
HN153785	3.7 mm	8.5 mm	7.8 mm	23 mm
HN154385	4.3 mm	8.5 mm	7.8 mm	23 mm
HN155395	5.3 mm	9.5 mm	7.3 mm	23 mm
HN156412	6.4 mm	12 mm	11 mm	28.8 mm

Nylon Insulated Hook Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	W	L1	L
HN403772	3.7 mm	7.2 mm	6.1 mm	23.2 mm
HN404395	4.3 mm	9.5 mm	9.5 mm	26.2 mm
HN405395	5.3 mm	9.5 mm	9.5 mm	26.2 mm
HN406412	6.4 mm	12 mm	10.3 mm	29.5 mm
HN408415	8.4 mm	15 mm	13.5 mm	34.7 mm

Nylon Insulated Flange Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	W	L1	L
FSN053275	3.2 mm	7.5 mm	5.1 mm	20 mm
FSN053264	3.2 mm	6.4 mm	5.1 mm	20 mm
FSN053764	3.7 mm	6.4 mm	5.1 mm	20 mm
FSN053775	3.7 mm	7.5 mm	5.1 mm	20 mm
FSN053785	3.7 mm	8.5 mm	7.2 mm	25.5 mm
FSN054375	4.3 mm	7.5 mm	5.1 mm	20 mm
FSN054385	4.3 mm	8.5 mm	7.2 mm	25.5 mm
FSN055375	5.3 mm	7.5 mm	5.1 mm	20 mm
FSN055385	5.3 mm	8.5 mm	7.2 mm	25.5 mm

Nylon Insulated Flange Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	D	L1	L
FSN153775	3.7 mm	7.5 mm	5.2 mm	20.5 mm
FSN153785	3.7 mm	8.5 mm	7.2 mm	24 mm
FSN154375	4.3 mm	7.5 mm	5.2 mm	20.5 mm
FSN154380	4.3 mm	8 mm	6.8 mm	24.5 mm
FSN154385	4.3 mm	8.5 mm	7.2 mm	24 mm
FSN155375	5.3 mm	7.5 mm	5.2 mm	20.5 mm
FSN155385	5.3 mm	8.5 mm	7.2 mm	24 mm

Nylon Insulated Flange Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	D	L1	L
FSN403285	3.2 mm	8.5 mm	7.5 mm	26.5 mm
FSN403776	3.7 mm	7.6 mm	6.2 mm	26.5 mm
FSN403785	3.7 mm	8.5 mm	7.5 mm	28 mm
FSN404376	4.3 mm	7.6 mm	6.2 mm	27 mm
FSN404385	4.3 mm	8.5 mm	7.5 mm	28 mm
FSN405376	5.3 mm	7.6 mm	6.2 mm	27 mm
FSN405385	5.3 mm	8.5 mm	7.5 mm	28 mm

Nylon Insulated Lipped Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	W	L1	L2	L
LBN053017	3 mm	17.2 mm	11 mm	28.2 mm
LBN054617	4.6 mm	17.2 mm	11 mm	28.2 mm

Nylon Insulated Lipped Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	W	L1	L2	L
LBN153017	3 mm	17.2 mm	11 mm	28.2 mm
LBN154617	4.6 mm	17.2 mm	11 mm	28.2 mm

Nylon Insulated Lipped Blade Terminal


Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	W	L1	L2	L
LBN403017	3 mm	17.2 mm	13.5 mm	30.7 mm
LBN404617	4.6 mm	17.2 mm	13.5 mm	30.7 mm

Nylon Insulated PIN Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	W	L1	L2	L
PN051909	1.9 mm	9 mm	11 mm	20 mm
PN051910	1.9 mm	10 mm	11 mm	21 mm
PN051912	1.9 mm	12 mm	11 mm	23 mm
PN051913	1.9 mm	13 mm	11 mm	24 mm
PN051914	1.9 mm	14 mm	11 mm	25 mm
PN051916	1.9 mm	16 mm	11 mm	27 mm

Nylon Insulated PIN Terminal

Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	W	L1	L2	L
PN151909	1.9 mm	9 mm	11 mm	20 mm
PN151910	1.9 mm	10 mm	11 mm	21 mm
PN151913	1.9 mm	13 mm	11 mm	24 mm
PN151916	1.9 mm	16 mm	11 mm	27 mm

Nylon Insulated PIN Terminal

Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 0.5mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²




Part-no.	W	L1	L2	L
PN402614	3 mm	17.2 mm	13.5 mm	30.7 mm

Insulated Crimp Terminals

Nylon Insulated Locking Terminal


Insulation Material - Nylon (PA)
Insulation Color - Red
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	D1	D	L1	L
LN053764	3.7 mm	6.4 mm	6.5 mm	22 mm
LN054372	4.3 mm	7.2 mm	6.5 mm	22 mm
LN054364	4.3 mm	6.4 mm	6.5 mm	22 mm
LN055381	5.3 mm	8.1 mm	6.5 mm	22 mm
LN055395	5.3 mm	9.5 mm	6.5 mm	22 mm

Nylon Insulated Locking Terminal


Insulation Material - Nylon (PA)
Insulation Color - Blue
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	D1	D	L1	L
LN153760	3.7 mm	6 mm	6.5 mm	22 mm
LN154372	4.3 mm	7.2 mm	6.5 mm	22 mm
LN154381	4.3 mm	8.1 mm	6.5 mm	22 mm
LN155381	5.3 mm	8.1 mm	6.5 mm	22 mm
LN155393	5.3 mm	9.3 mm	6.5 mm	22 mm

Nylon Insulated Locking Terminal

Insulation Material - Nylon (PA)
Insulation Color - Yellow
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	D1	D	L1	L
LN403783	3.7 mm	8.3 mm	7 mm	25.7 mm
LN404383	4.3 mm	8.3 mm	7 mm	25.7 mm
LN405309	5.3 mm	9 mm	7 mm	25.7 mm
LN406412	6.4 mm	12 mm	12 mm	32.2 mm

Nylon Insulated 3-way Terminal


Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.



Part-no.	L	D	color	wire range
RN3054080	18 mm	4 mm	Red	22-16A.W.G / 0.5-1.5mm ²
RN3154080	19 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
RN3404080	23 mm	6.5 mm	Yellow	12-10A.W.G / 4.0-6.0mm ²

Nylon Insulated 4-way Terminal

Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 105°C max.

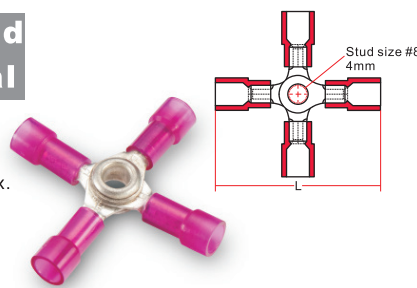


Part-no.	L	D	color	wire range
RN4054080	35 mm	4 mm	Red	22-16A.W.G / 0.5-1.5mm ²
RN4154080	36.5 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
RN4404080	44 mm	6.5 mm	Yellow	12-10A.W.G / 4.0-6.0mm ²

Vinyl Pre-Insulated Crimp Terminal connectors, Dis-connectors



Vinyl Insulated Male Tab Connector


Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	T	W	L1	L
MDV050528	0.5 mm	2.8 mm	6.5 mm	19.5 mm
MDV050828	0.8 mm	2.8 mm	6.5 mm	20.5 mm
MDV050548	0.5 mm	4.8 mm	6.5 mm	19.5 mm
MDV050848	0.8 mm	4.8 mm	6.5 mm	20.5 mm
MDV050864	0.8 mm	6.4 mm	7.7 mm	21 mm

Vinyl Insulated Male Tab Connector


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	T	W	L1	L
MDV150548	0.5 mm	4.8 mm	6.5 mm	19 mm
MDV150848	0.8 mm	4.8 mm	6.7 mm	21 mm
MDV150864	0.8 mm	6.4 mm	7.7 mm	21 mm

Vinyl Insulated Male Tab Connector


Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	T	W	L1	L
MDV400548	0.5 mm	4.8 mm	7.7 mm	25 mm
MDV400848	0.8 mm	4.8 mm	7.7 mm	25 mm
MDV400864	0.8 mm	6.4 mm	7.7 mm	25 mm

Vinyl Insulated Female Disconnecter

Insulation Material - Vinyl (PVC)
Insulation Color - Red
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²




Part-no.	T	TAB	L1	L
FDV050528	0.5 mm	2.8 mm	6.5 mm	18.6 mm
FDV050828	0.8 mm	2.8 mm	6.5 mm	18.6 mm
FDV050548	0.5 mm	4.8 mm	6.5 mm	19 mm
FDV050852	0.8 mm	4.8 mm	6.5 mm	19 mm
FDV050552	0.5 mm	5.2 mm	5.8 mm	18.5 mm
FDV050852	0.8 mm	5.2 mm	5.8 mm	18.5 mm
FDV050864	0.8 mm	6.4 mm	7.5 mm	20.5 mm
FDV050880	0.8 mm	8.0 mm	10 mm	24.2 mm

Insulated Crimp Dis-connector

Vinyl Insulated Female Disconnecter


Insulation Material - Vinyl (PVC)
Insulation Color - Blue
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	T	TAB	L1	L
FDV150528	0.5 mm	2.8 mm	6.5 mm	18.6 mm
FDV150828	0.8 mm	2.8 mm	6.5 mm	18.6 mm
FDV150548	0.5 mm	4.8 mm	6.5 mm	19 mm
FDV150848	0.8 mm	4.8 mm	6.5 mm	19 mm
FDV150552	0.5 mm	5.2 mm	5.8 mm	18.5 mm
FDV150852	0.8 mm	5.2 mm	5.8 mm	18.5 mm
FDV150864	0.8 mm	6.4 mm	7.5 mm	20.5 mm
FDV150880	0.8 mm	8.0 mm	10 mm	24.2 mm
FDV151294	1.2 mm	9.4 mm	12 mm	25.5 mm


Vinyl Insulated Female Disconnecter

Insulation Material - Vinyl (PVC)
Insulation Color - Yellow
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	T	TAB	L1	L
FDV400528	0.5 mm	2.8 mm	6.5 mm	22 mm
FDV400828	0.8 mm	2.8 mm	6.5 mm	22 mm
FDV400548	0.5 mm	4.8 mm	6.5 mm	22 mm
FDV400848	0.8 mm	4.8 mm	6.5 mm	22 mm
FDV400864	0.5 mm	6.4 mm	7.5 mm	23.5 mm
FDV401294	1.2 mm	9.4 mm	12 mm	28.5 mm

Vinyl Insulated Piggyback Connector

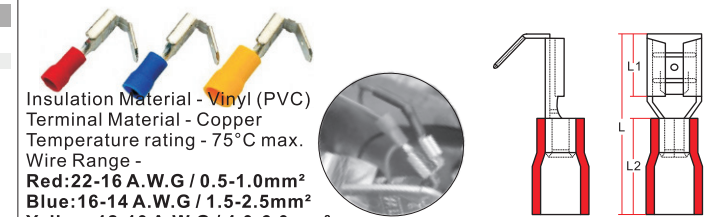

Part-no.	TAB	L1	L2	L	color
PBV050864	0.8 x 6.4 mm	7.5 mm	10 mm	20 mm	Red
PBV150864	0.8 x 6.4 mm	7.5 mm	11 mm	21 mm	Blue
PBV400864	0.8 x 6.4 mm	7.5 mm	13 mm	25 mm	Yellow

Vinyl Insulated Bullet Male/Female Disconnecter




Part-no.	Type	L1	L2	L	color
MBV054021	M	8.5 mm	10 mm	20.5 mm	Red
MBV154021	M	8.5 mm	11 mm	21.5 mm	Blue
MBV155021	M	9 mm	11 mm	22 mm	Blue
MBV405025	M	9 mm	13 mm	26 mm	Yellow
FBFV053923	F	7 mm	10 mm	22 mm	Red
FBFV153923	F	7 mm	11 mm	23 mm	Blue
FBFV154923	F	7.3 mm	11 mm	23.5 mm	Blue
FBFV404524	F	7.3 mm	13 mm	24 mm	Yellow



Vinyl Insulated Female Disconnecter


Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 75°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²

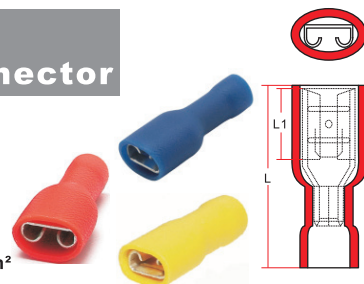

Part-no.	receptacle	L1	L	color
FDFV050528	0.5 x 2.8 mm	6.4 mm	29 mm	Red
FDFV050828	0.8 x 2.8 mm	6.4 mm	21 mm	Red
FDFV050548	0.5 x 4.8 mm	6.4 mm	29 mm	Red
FDFV050848	0.8 x 4.8 mm	6.4 mm	23 mm	Red
FDFV050864	0.8 x 6.4 mm	8 mm	25 mm	Red
FDFV150548	0.5 x 4.8 mm	6.4 mm	20 mm	Blue
FDFV150848	0.8 x 4.8 mm	6.4 mm	20 mm	Blue
FDFV150864	0.8 x 6.4 mm	6.4 mm	22 mm	Blue
FDFV400864	0.8 x 6.4 mm	8 mm	24 mm	Yellow
FDFV401295	1.2 x 9.5 mm	12.5 mm	30 mm	Yellow

Nylon Insulated Bullet Female Disconnecter


Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²

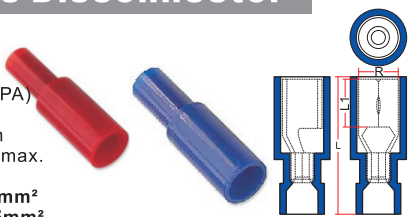

Part-no.	R	L1	L	color
FBFN053924	ø3.9 mm	7 mm	23.5 mm	Red
FBFN153924	ø3.9 mm	7 mm	23.5 mm	Blue
FBFN154924	ø4.9 mm	7.3 mm	24 mm	Blue

Nylon Insulated Flag Disconnecter

Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²




Part-no.	receptacle	L1	L	color
FFFN050548	0.5 x 4.8 mm	7 mm	15.2 mm	Red
FFFN050848	0.8 x 4.8 mm	7 mm	15.2 mm	Red
FFFN050864	0.8 x 6.4 mm	7.6 mm	16 mm	Red
FFFN150548	0.5 x 4.8 mm	7 mm	15.2 mm	Blue
FFFN150848	0.8 x 4.8 mm	7 mm	15.2 mm	Blue
FFFN150864	0.8 x 6.4 mm	7.6 mm	16 mm	Blue
FFFN400864	0.8 x 6.4 mm	7.6 mm	16.5 mm	Yellow

Insulated Crimp Terminals

Nylon Insulated Male Tab Connector


Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²



Part-no.	Tab	L1	L	color
T2MDFN050864	0.8 x 6.4 mm	7.7 mm	23 mm	Red
T2MDFN150864	0.8 x 6.4 mm	7.7 mm	24 mm	Blue
T2MDFN400864	0.8 x 6.4 mm	7.7 mm	25 mm	Yellow

Nylon Insulated Female Disconnecter


Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²

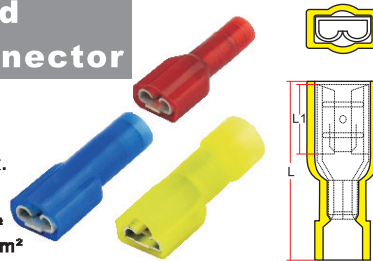

Part-no.	receptacle	L1	L	color
T2FDFN050864	0.8 x 6.4 mm	8 mm	22 mm	Red
T2FDFN150864	0.8 x 6.4 mm	8 mm	22 mm	Blue
T2FDFN400864	0.8 x 6.4 mm	8 mm	24 mm	Yellow

Nylon Insulated Male Tab Connector


Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²

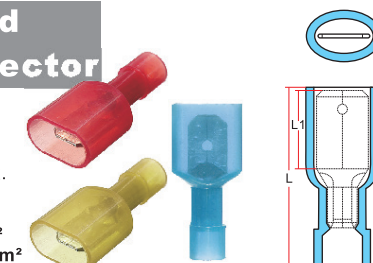

Part-no.	Tab	L1	L	color
MDFN050864	0.8 x 6.4 mm	7.7 mm	23 mm	Red
MDFN150864	0.8 x 6.4 mm	7.7 mm	24 mm	Blue
MDFN400864	0.8 x 6.4 mm	7.75 mm	25 mm	Yellow

Nylon Insulated Female Disconnecter

Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²

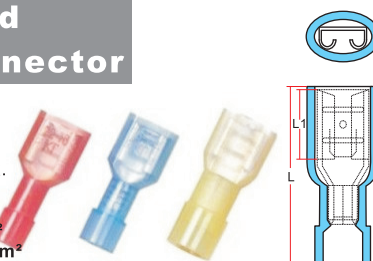


Part-no.	receptacle	L1	L	color
FDFN050528	0.5 x 2.8 mm	6.4 mm	20 mm	Red
FDFN050828	0.8 x 2.8 mm	6.4 mm	20 mm	Red
FDFN050548	0.5 x 4.8 mm	6.4 mm	20 mm	Red
FDFN050848	0.8 x 4.8 mm	6.4 mm	20 mm	Red
FDFN050864	0.8 x 6.4 mm	8 mm	22 mm	Red
FDFN150548	0.5 x 4.8 mm	6.5 mm	21 mm	Blue
FDFN150848	0.8 x 4.8 mm	6.5 mm	21 mm	Blue
FDFN150864	0.8 x 6.4 mm	8 mm	22 mm	Blue
FDFN400864	0.8 x 6.4 mm	8 mm	24 mm	Yellow
FDFN401295	1.2 x 9.5 mm	12.5 mm	30 mm	Yellow

Soft PVC Insulated Open Barrel Connector, Disconnecter



Soft PVC Insulated Open Barrel Male Tab Connector

Insulation Material - Soft PVC
Insulation Color: Transparent
Terminal Material: Brass / Tinned Brass
Temperature rating: 75°C max.



(. 110°)

Part-no.	wire size	Tab	Terminal
OBM050528B	0.5-1mm ²	0.5 x 2.8 mm	Blank Brass
OBM050528T	0.5-1mm ²	0.5 x 2.8 mm	Tinned Brass
OBM050828B	0.5-1mm ²	0.8 x 2.8 mm	Blank Brass
OBM050828T	0.5-1mm ²	0.8 x 2.8 mm	Tinned Brass
OBM050548B	0.5-1mm ²	0.5 x 4.8 mm	Blank Brass
OBM050548T	0.5-1mm ²	0.5 x 4.8 mm	Tinned Brass
OBM050848B	0.5-1mm ²	0.8 x 4.8 mm	Blank Brass
OBM050848T	0.5-1mm ²	0.8 x 4.8 mm	Tinned Brass
OBM050563B	0.5-1mm ²	0.5 x 6.3 mm	Blank Brass
OBM050563T	0.5-1mm ²	0.5 x 6.3 mm	Tinned Brass
OBM050863B	0.5-1mm ²	0.8 x 6.3 mm	Blank Brass
OBM050863T	0.5-1mm ²	0.8 x 6.3 mm	Tinned Brass

(. 187°)

Part-no.	wire size	Tab	Terminal
OBM150528B	1.5-2.5mm ²	0.5 x 2.8 mm	Blank Brass
OBM150528T	1.5-2.5mm ²	0.5 x 2.8 mm	Tinned Brass
OBM150828B	1.5-2.5mm ²	0.8 x 2.8 mm	Blank Brass
OBM150828T	1.5-2.5mm ²	0.8 x 2.8 mm	Tinned Brass
OBM150548B	1.5-2.5mm ²	0.5 x 4.8 mm	Blank Brass
OBM150548T	1.5-2.5mm ²	0.5 x 4.8 mm	Tinned Brass
OBM150848B	1.5-2.5mm ²	0.8 x 4.8 mm	Blank Brass
OBM150848T	1.5-2.5mm ²	0.8 x 4.8 mm	Tinned Brass
OBM150563B	1.5-2.5mm ²	0.5 x 6.3 mm	Blank Brass
OBM150563T	1.5-2.5mm ²	0.5 x 6.3 mm	Tinned Brass
OBM150863B	1.5-2.5mm ²	0.8 x 6.3 mm	Blank Brass
OBM150863T	1.5-2.5mm ²	0.8 x 6.3 mm	Tinned Brass

(. 250°)

Part-no.	wire size	Tab	Terminal
OBM400528B	4.0-6.0 mm ²	0.5 x 2.8 mm	Blank Brass
OBM400528T	4.0-6.0 mm ²	0.5 x 2.8 mm	Tinned Brass
OBM400828B	4.0-6.0 mm ²	0.8 x 2.8 mm	Blank Brass
OBM400828T	4.0-6.0 mm ²	0.8 x 2.8 mm	Tinned Brass
OBM400548B	4.0-6.0 mm ²	0.5 x 4.8 mm	Blank Brass
OBM400548T	4.0-6.0 mm ²	0.5 x 4.8 mm	Tinned Brass
OBM400848B	4.0-6.0 mm ²	0.8 x 4.8 mm	Blank Brass
OBM400848T	4.0-6.0 mm ²	0.8 x 4.8 mm	Tinned Brass
OBM400563B	4.0-6.0 mm ²	0.5 x 6.3 mm	Blank Brass
OBM400563T	4.0-6.0 mm ²	0.5 x 6.3 mm	Tinned Brass
OBM400863B	4.0-6.0 mm ²	0.8 x 6.3 mm	Blank Brass
OBM400863T	4.0-6.0 mm ²	0.8 x 6.3 mm	Tinned Brass

PVC Insulated open barrel Terminals

Soft PVC Insulated Open Barrel Female Disconnecter

Insulation Material - Soft PVC
Insulation Color: Transparent
Terminal Material: Brass / Tinned Brass
Temperature rating: 75°C max.



(. 110°)

Part-no.	wire size	receptacle	Terminal
OBF050528B	0.5-1mm ²	0.5 x 2.8 mm	Blank Brass
OBF050528T	0.5-1mm ²	0.5 x 2.8 mm	Tinned Brass
OBF050828B	0.5-1mm ²	0.8 x 2.8 mm	Blank Brass
OBF050828T	0.5-1mm ²	0.8 x 2.8 mm	Tinned Brass
OBF050548B	0.5-1mm ²	0.5 x 4.8 mm	Blank Brass
OBF050548T	0.5-1mm ²	0.5 x 4.8 mm	Tinned Brass
OBF050848B	0.5-1mm ²	0.8 x 4.8 mm	Blank Brass
OBF050848T	0.5-1mm ²	0.8 x 4.8 mm	Tinned Brass
OBF050563B	0.5-1mm ²	0.5 x 6.3 mm	Blank Brass
OBF050563T	0.5-1mm ²	0.5 x 6.3 mm	Tinned Brass
OBF050863B	0.5-1mm ²	0.8 x 6.3 mm	Blank Brass
OBF050863T	0.5-1mm ²	0.8 x 6.3 mm	Tinned Brass

(. 187°)


Part-no.	wire size	receptacle	Terminal
OBF150528B	1.5-2.5mm ²	0.5 x 2.8 mm	Blank Brass
OBF150528T	1.5-2.5mm ²	0.5 x 2.8 mm	Tinned Brass
OBF150828B	1.5-2.5mm ²	0.8 x 2.8 mm	Blank Brass
OBF150828T	1.5-2.5mm ²	0.8 x 2.8 mm	Tinned Brass
OBF150548B	1.5-2.5mm ²	0.5 x 4.8 mm	Blank Brass
OBF150548T	1.5-2.5mm ²	0.5 x 4.8 mm	Tinned Brass
OBF150848B	1.5-2.5mm ²	0.8 x 4.8 mm	Blank Brass
OBF150848T	1.5-2.5mm ²	0.8 x 4.8 mm	Tinned Brass
OBF150563B	1.5-2.5mm ²	0.5 x 6.3 mm	Blank Brass
OBF150563T	1.5-2.5mm ²	0.5 x 6.3 mm	Tinned Brass
OBF150863B	1.5-2.5mm ²	0.8 x 6.3 mm	Blank Brass
OBF150863T	1.5-2.5mm ²	0.8 x 6.3 mm	Tinned Brass

(. 250°)

Part-no.	wire size	receptacle	Terminal
OBF400528B	4.0-6.0 mm ²	0.5 x 2.8 mm	Blank Brass
OBF400528T	4.0-6.0 mm ²	0.5 x 2.8 mm	Tinned Brass
OBF400828B	4.0-6.0 mm ²	0.8 x 2.8 mm	Blank Brass
OBF400828T	4.0-6.0 mm ²	0.8 x 2.8 mm	Tinned Brass
OBF400548B	4.0-6.0 mm ²	0.5 x 4.8 mm	Blank Brass
OBF400548T	4.0-6.0 mm ²	0.5 x 4.8 mm	Tinned Brass
OBF400848B	4.0-6.0 mm ²	0.8 x 4.8 mm	Blank Brass
OBF400848T	4.0-6.0 mm ²	0.8 x 4.8 mm	Tinned Brass
OBF400563B	4.0-6.0 mm ²	0.5 x 6.3 mm	Blank Brass
OBF400563T	4.0-6.0 mm ²	0.5 x 6.3 mm	Tinned Brass
OBF400863B	4.0-6.0 mm ²	0.8 x 6.3 mm	Blank Brass
OBF400863T	4.0-6.0 mm ²	0.8 x 6.3 mm	Tinned Brass

Soft PVC Insulated Open Barrel Flag Disconnecter

Insulation Material - Soft PVC
Insulation Color: Transparent
Terminal Material: Brass / Tinned Brass
Temperature rating: 75°C max.




(. 110°)

Part-no.	wire size	receptacle	Terminal
OBF050548B	0.5-1mm ²	0.5 x 4.8 mm	Blank Brass
OBF050548T	0.5-1mm ²	0.5 x 4.8 mm	Tinned Brass
OBF050848B	0.5-1mm ²	0.8 x 4.8 mm	Blank Brass
OBF050848T	0.5-1mm ²	0.8 x 4.8 mm	Tinned Brass
OBF050563B	0.5-1mm ²	0.5 x 6.3 mm	Blank Brass
OBF050563T	0.5-1mm ²	0.5 x 6.3 mm	Tinned Brass
OBF050863B	0.5-1mm ²	0.8 x 6.3 mm	Blank Brass
OBF050863T	0.5-1mm ²	0.8 x 6.3 mm	Tinned Brass


(. 187°)

Part-no.	wire size	receptacle	Terminal
OBF150548B	1.5-2.5mm ²	0.5 x 4.8 mm	Blank Brass
OBF150548T	1.5-2.5mm ²	0.5 x 4.8 mm	Tinned Brass
OBF150848B	1.5-2.5mm ²	0.8 x 4.8 mm	Blank Brass
OBF150848T	1.5-2.5mm ²	0.8 x 4.8 mm	Tinned Brass
OBF150563B	1.5-2.5mm ²	0.5 x 6.3 mm	Blank Brass
OBF150563T	1.5-2.5mm ²	0.5 x 6.3 mm	Tinned Brass
OBF150863B	1.5-2.5mm ²	0.8 x 6.3 mm	Blank Brass
OBF150863T	1.5-2.5mm ²	0.8 x 6.3 mm	Tinned Brass

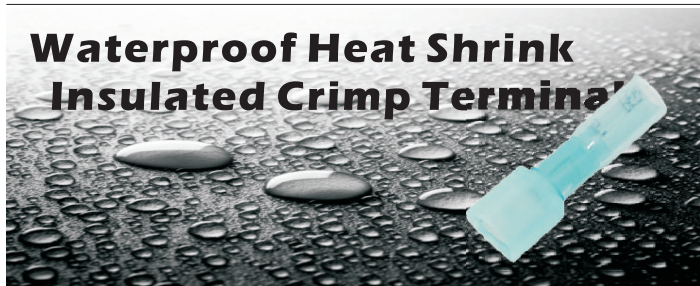

Heat Shrink Insulated Ring Terminal


Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 150°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	ød1	øD	L	color
HSR053255	3.2 mm	5.5 mm	25.5 mm	Red
HSR053755	3.7 mm	5.5 mm	27.6 mm	Red
HSR053766	3.7 mm	6.6 mm	25.5 mm	Red
HSR053780	3.7 mm	8 mm	29 mm	Red
HSR054366	4.3 mm	6.6 mm	29 mm	Red
HSR054380	4.3 mm	8 mm	27.6 mm	Red
HSR055380	5.3 mm	8 mm	34.7 mm	Red
HSR055312	5.3 mm	11.6 mm	29 mm	Red
HSR056412	6.4 mm	11.6 mm	34.7 mm	Red
HSR058412	8.4 mm	12 mm	34.7 mm	Red
HSR051015	10 mm	14.5 mm	39 mm	Red

Heat Shrink Insulated Ring Terminal


Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 150°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	ød1	øD	L	color
HSR153255	3.2 mm	5.5 mm	27.6 mm	Blue
HSR153766	3.7 mm	6.6 mm	27.6 mm	Blue
HSR153780	3.7 mm	8 mm	29 mm	Blue
HSR154366	4.3 mm	6.6 mm	29 mm	Blue
HSR154380	4.3 mm	8 mm	27.6 mm	Blue
HSR155380	5.3 mm	8 mm	29 mm	Blue
HSR155395	5.3 mm	9.5 mm	29 mm	Blue
HSR156412	6.4 mm	12 mm	34.7 mm	Blue
HSR158412	8.4 mm	12 mm	34.7 mm	Blue
HSR151015	10 mm	14.5 mm	39 mm	Blue

Heat Shrink Insulated Ring Terminal

Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 150°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²




Part-no.	ød1	øD	L	color
HSR403272	3.2 mm	7.2 mm	32.7 mm	Yellow
HSR403772	3.7 mm	7.2 mm	32.7 mm	Yellow
HSR404372	4.3 mm	7.2 mm	35.8 mm	Yellow
HSR404395	4.3 mm	9.5 mm	32.7 mm	Yellow
HSR405395	5.3 mm	9.5 mm	35.8 mm	Yellow
HSR406411	6.4 mm	11 mm	39 mm	Yellow
HSR408414	8.4 mm	14 mm	44.2 mm	Yellow
HSR401015	10 mm	15 mm	44.2 mm	Yellow
HSR401019	10 mm	19 mm	48.5 mm	Yellow
HSR401319	13 mm	19 mm	48.5 mm	Yellow

Heat Shrink Insulated Crimp Terminals

Heat Shrink Insulated Fork Terminal


Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 150°C max.
Wire Range - 22-16 A.W.G / 0.5-1.5mm²



Part-no.	ød1	D	L	color
HSF053257	3.2 mm	5.7 mm	27.3 mm	Red
HSF053757	3.7 mm	5.7 mm	27.3 mm	Red
HSF053764	3.7 mm	6.4 mm	27.7 mm	Red
HSF054364	4.3 mm	6.4 mm	27.7 mm	Red
HSF054372	4.3 mm	7.2 mm	28.1 mm	Red
HSF055395	5.3 mm	9.5 mm	25.2 mm	Red
HSF056495	6.4 mm	9.5 mm	25.2 mm	Red
HSF056411	6.4 mm	11 mm	34.5 mm	Red

Heat Shrink Insulated Fork Terminal



Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 0.8mm
Temperature rating - 150°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	ød1	D	L	color
HSF153260	3.2 mm	6 mm	27.5 mm	Blue
HSF153760	3.7 mm	6 mm	27.5 mm	Blue
HSF153764	3.7 mm	6.4 mm	27.7 mm	Blue
HSF153772	3.7 mm	7.2 mm	28.1 mm	Blue
HSF154368	4.3 mm	6.8 mm	27.7 mm	Blue
HSF154372	4.3 mm	7.2 mm	28.1 mm	Blue
HSF154380	4.3 mm	8 mm	28.5 mm	Blue
HSF155385	5.3 mm	8.5 mm	28.5 mm	Blue
HSF155395	5.3 mm	9.5 mm	29.2 mm	Blue
HSF156495	6.4 mm	9.5 mm	29.2 mm	Blue
HSF156411	6.4 mm	11 mm	34.5 mm	Blue

Heat Shrink Insulated Fork Terminal


Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 150°C max.
Wire Range - 12-10 A.W.G / 4.0-6.0mm²



Part-no.	ød1	D	L	color
HSF403258	3.2 mm	5.8 mm	32.9 mm	Yellow
HSF403764	3.7 mm	6.4 mm	33.7 mm	Yellow
HSF404372	4.3 mm	7.2 mm	33.7 mm	Yellow
HSF405395	5.3 mm	9.5 mm	35.8 mm	Yellow
HSF406480	6.4 mm	8 mm	35.8 mm	Yellow
HSF406412	6.4 mm	12 mm	41 mm	Yellow
HSF408414	8.4 mm	14 mm	44 mm	Yellow
HSF408418	8.4 mm	18 mm	46.5 mm	Yellow

Heat Shrink Insulated 3-way Terminal

Adhesive Lined heat shrinking shrinking ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 150°C max.

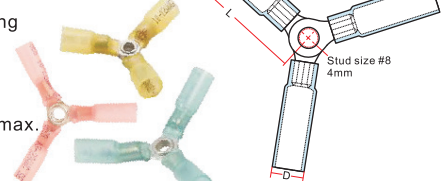


Part-no.	L	D	color	wire range
HSR3054080	17 mm	4 mm	Red	22-16A.W.G / 0.5-1.5mm ²
HSR3154080	18 mm	4.5 mm	Blue	16-14A.W.G / 1.5-2.5mm ²
HSR3404080	22 mm	6.5 mm	Yellow	12-10A.W.G / 4.0-6.0mm ²

Heat Shrink Insulated Terminal connectors, Dis-connectors IP65



Heat Shrink Insulated Male Tab Connector


Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²



Part-no.	Tab	L1	L	color
HSMD050528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Red
HSMD050828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Red
HSMD050548	0.5 x 4.8 mm	6.5 mm	32.5 mm	Red
HSMD050848	0.8 x 4.8 mm	6.7 mm	32.7 mm	Red
HSMD050864	0.8 x 6.4 mm	7.7 mm	33.7 mm	Red
HSMD150548	0.5 x 4.8 mm	6.5 mm	32.5 mm	Blue
HSMD150848	0.8 x 4.8 mm	6.7 mm	32.7 mm	Blue
HSMD150864	0.8 x 6.4 mm	7.7 mm	33.7 mm	Blue
HSMD400548	0.5 x 4.8 mm	6.5 mm	34.5 mm	Yellow
HSMD400848	0.8 x 4.8 mm	6.7 mm	34.7 mm	Yellow
HSMD400864	0.8 x 6.4 mm	7.7 mm	35.7 mm	Yellow

Heat Shrink Insulated Female Disconnector


Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²



Part-no.	receptacle	L1	L	color
HSFD050528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Red
HSFD050828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Red
HSFD050548	0.5 x 4.8 mm	6.4 mm	32.4 mm	Red
HSFD050848	0.8 x 4.8 mm	6.4 mm	32.4 mm	Red
HSFD050552	0.5 x 5.2 mm	5.8 mm	31.8 mm	Red
HSFD050852	0.8 x 5.2 mm	5.8 mm	31.8 mm	Red
HSFD050864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Red
HSFD050880	0.8 x 8.0 mm	10 mm	36 mm	Red
HSFD150528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Blue
HSFD150828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Blue
HSFD150548	0.5 x 4.8 mm	6.4 mm	32.4 mm	Blue
HSFD150848	0.8 x 4.8 mm	6.4 mm	32.4 mm	Blue
HSFD150552	0.5 x 5.2 mm	5.8 mm	31.8 mm	Blue
HSFD150852	0.8 x 5.2 mm	5.8 mm	31.8 mm	Blue
HSFD150864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Blue
HSFD150880	0.8 x 8.0 mm	10 mm	36 mm	Blue
HSFD151294	1.2 x 9.4 mm	12 mm	38 mm	Blue
HSFD400528	0.5 x 2.8 mm	6.5 mm	34.5 mm	Yellow
HSFD400828	0.8 x 2.8 mm	6.5 mm	34.5 mm	Yellow
HSFD400548	0.5 x 4.8 mm	6.5 mm	34.5 mm	Yellow
HSFD400848	0.8 x 4.8 mm	6.5 mm	34.5 mm	Yellow
HSFD400864	0.8 x 6.4 mm	7.5 mm	35.5 mm	Yellow
HSFD401294	1.2 x 9.4 mm	12 mm	40 mm	Yellow

Heat Shrink Insulated Piggyback Connector

Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.0mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²




Part-no.	TAB	L1	L	color
HSPB050864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Red
HSPB150864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Blue
HSPB400864	0.8 x 6.4 mm	7.5 mm	35.5 mm	Yellow

Heat Shrink Insulated Crimp Dis-connector

Fully Heat Shrink Insulated Male Tab Connector


Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²



Part-no.	receptacle	L1	L	color
FHSMD050528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Red
FHSMD050828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Red
FHSMD050548	0.5 x 4.8 mm	6.5 mm	32.5 mm	Red
FHSMD050848	0.8 x 4.8 mm	6.7 mm	32.7 mm	Red
FHSMD050864	0.8 x 6.4 mm	7.7 mm	33.7 mm	Red
FHSMD150548	0.5 x 4.8 mm	6.5 mm	32.5 mm	Blue
FHSMD150848	0.8 x 4.8 mm	6.7 mm	32.7 mm	Blue
FHSMD150864	0.8 x 6.4 mm	7.7 mm	33.7 mm	Blue
FHSMD400548	0.5 x 4.8 mm	6.5 mm	34.5 mm	Yellow
FHSMD400848	0.8 x 4.8 mm	6.7 mm	34.7 mm	Yellow
FHSMD400864	0.8 x 6.4 mm	7.7 mm	35.7 mm	Yellow

Fully Heat Shrink Female Disconnector


Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.
Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²



Part-no.	receptacle	L1	L	color
FHSFD050528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Red
FHSFD050828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Red
FHSFD050548	0.5 x 4.8 mm	6.4 mm	32.4 mm	Red
FHSFD050848	0.8 x 4.8 mm	6.4 mm	32.4 mm	Red
FHSFD050552	0.5 x 5.2 mm	5.8 mm	31.8 mm	Red
FHSFD050852	0.8 x 5.2 mm	5.8 mm	31.8 mm	Red
FHSFD050864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Red
FHSFD050880	0.8 x 8.0 mm	10 mm	36 mm	Red
FHSFD150528	0.5 x 2.8 mm	6.5 mm	32.5 mm	Blue
FHSFD150828	0.8 x 2.8 mm	6.5 mm	32.5 mm	Blue
FHSFD150548	0.5 x 4.8 mm	6.4 mm	32.4 mm	Blue
FHSFD150848	0.8 x 4.8 mm	6.4 mm	32.4 mm	Blue
FHSFD150552	0.5 x 5.2 mm	5.8 mm	31.8 mm	Blue
FHSFD150852	0.8 x 5.2 mm	5.8 mm	31.8 mm	Blue
FHSFD150864	0.8 x 6.4 mm	7.5 mm	33.5 mm	Blue
FHSFD150880	0.8 x 8.0 mm	10 mm	36 mm	Blue
FHSFD151294	1.2 x 9.4 mm	12 mm	38 mm	Blue
FHSFD400528	0.5 x 2.8 mm	6.5 mm	34.5 mm	Yellow
FHSFD400828	0.8 x 2.8 mm	6.5 mm	34.5 mm	Yellow
FHSFD400548	0.5 x 4.8 mm	6.5 mm	34.5 mm	Yellow
FHSFD400848	0.8 x 4.8 mm	6.5 mm	34.5 mm	Yellow
FHSFD400864	0.8 x 6.4 mm	7.5 mm	35.5 mm	Yellow
FHSFD401294	1.2 x 9.4 mm	12 mm	40 mm	Yellow

Heat shrink Insulated Bullet Male/Female Disconnector


Insulation Material - HDPE
Terminal Material - Brass
Temperature rating - 150°C max.



Wire Range -
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²


Part-no.	Type	L1	L	color
HSMB054085	M	8.5 mm		

Insulated Cord End Sleeves (Cable Ferrules)

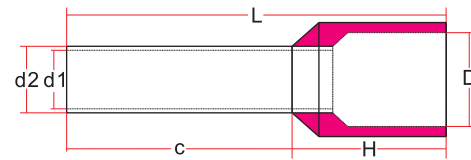


WIRE RANGE mm ²	Part-no.	Dimension (MM)						COLOR Code	
		H	c	L	d1	d2	D	Colors F	Colors D
0.25mm ²	CF0250610N	4.00	6.00	10.0	0.75	1.10	1.90	VIOLET	LIGHT BLUE
	CF0250812N	4.00	8.00	12.0	0.75	1.10	1.90		
0.34mm ²	CF0340610N	4.00	6.00	10.0	0.80	1.10	1.90	PINK	TURQUOISE
	CF0340812N	4.00	8.00	12.0	0.80	1.10	1.90		
0.5mm ²	CF0500612N	6.00	6.00	12.0	1.00	1.30	2.60	WHITE	ORANGE
	CF0500814N	6.00	8.00	14.0	1.00	1.30	2.60		
	CF0501016N	6.00	10.0	16.0	1.00	1.30	2.60		
0.75mm ²	CF0750612N	6.00	6.00	12.0	1.20	1.50	2.80	BLUE	WHITE
	CF0750814N	6.00	8.00	14.0	1.20	1.50	2.80		
	CF0751016N	6.00	10.0	16.0	1.20	1.50	2.80		
	CF0751218N	6.00	12.0	18.0	1.20	1.50	2.80		
1.0mm ²	CF1000612N	6.00	6.00	12.0	1.40	1.70	3.00	RED	YELLOW
	CF1000814N	6.00	8.00	14.0	1.40	1.70	3.00		
	CF1001016N	6.00	10.0	16.0	1.40	1.70	3.00		
	CF1001218N	6.00	12.0	18.0	1.40	1.70	3.00		
1.5mm ²	CF1500814N	6.00	8.00	14.0	1.70	2.00	3.50	BLACK	RED
	CF1501016N	6.00	10.0	16.0	1.70	2.00	3.50		
	CF1501218N	6.00	12.0	18.0	1.70	2.00	3.50		
2.5mm ²	CF2500814N	6.00	8.00	14.0	2.20	2.60	4.20	GREY	BLUE
	CF2501016N	6.00	10.0	16.0	2.20	2.60	4.20		
	CF2501218N	6.00	12.0	18.0	2.20	2.60	4.20		
4.0mm ²	CF4001019N	9.00	10.0	19.0	2.80	3.20	4.80	ORANGE	GREY
	CF4001220N	8.00	12.0	20.0	2.80	3.20	4.80		
	CF4001826N	8.00	18.0	26.0	2.80	3.20	4.80		
6.0mm ²	CF6001220N	8.00	12.0	20.0	3.50	3.90	6.30	GREEN	BLACK
	CF6001826N	8.00	18.0	26.0	3.50	3.90	6.30		
10.0mm ²	CF1011222N	10.0	12.0	22.0	4.50	4.90	7.60	BROWN	IVORY
	CF1011828N	10.0	18.0	28.0	4.50	4.90	7.60		
25.0mm ²	CF2511628N	12.0	16.0	28.0	7.30	7.90	11.2	BLACK	BROWN
	CF2511635N	9.0	16.0	35.0	7.30	7.90	11.2		
35.0mm ²	CF3511630N	14.0	16.0	30.0	8.30	8.70	12.7	RED	BEIGE
	CF3511832N	14.0	18.0	32.0	8.30	8.70	12.7		
50.0mm ²	CF5012036N	16.0	20.0	36.0	10.3	10.9	15.0	BLUE	OLIVE
	CF5012540N	15.0	25.0	40.0	10.3	10.9	15.0		
70.0mm ²	CF7012137N	16.0	21.0	37.0	13.5	14.3	16.0		YELLOW
95.0mm ²	CF9512544N	19.0	25.0	44.0	14.7	15.6	18.0		RED
120.0mm ²	CF1222748N	21.0	27.0	48.0	16.7	17.7	20.0		BLUE
150.0mm ²	CF1523258N	26.0	32.0	58.0	19.5	20.6	23.0		YELLOW

Insulated Cord End Sleeves (Twin Cable Ferrules)

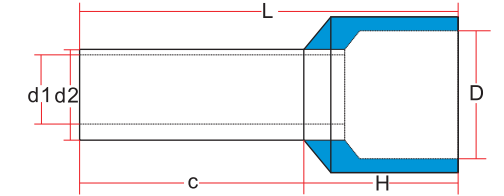

WIRE RANGE mm ²	Part no.	Dimension (MM)						COLOR Code	
		H	c	L	d1	d2	D	Colors F	Colors D
2 x 0.5mm ²	TCF0500815	7.00	8.00	15.0	1.5	1.8	5.00	WHITE	ORANGE
2 x 0.75mm ²	TCF0750815	7.00	8.00	15.0	1.8	2.1	5.50	BLUE	WHITE
	TCF0751017	7.00	10.0	17.0	1.8	2.1	5.50		
2 x 1.0mm ²	TCF1000815	7.00	8.00	15.0	2.0	2.3	5.50	RED	YELLOW
	TCF1001017	7.00	10.0	17.0	2.0	2.3	5.50		
2 x 1.5mm ²	TCF1500816	8.00	8.00	16.0	2.3	2.6	6.40	BLACK	RED
	TCF1501220	8.00	12.0	20.0	2.3	2.6	6.40		
2 x 2.5mm ²	TCF2501019	8.50	10.0	18.5	2.9	3.3	8.00	GREY	BLUE
	TCF2501322	8.50	13.0	21.5	2.9	3.3	8.00		
2 x 4.0mm ²	TCF4001223	11.0	12.0	23.0	3.8	4.2	8.80	ORANGE	GREY
2 x 6.0mm ²	TCF6001426	12.0	14.0	26.0	4.9	5.3	9.50	GREEN	BLACK
2 x 10.0mm ²	TCF1011427	12.5	14.0	26.5	6.5	6.9	12.6	BROWN	IVORY
2 x 16.0mm ²	TCF1611432	17.5	14.0	31.5	8.3	8.7	19.0	IVORY	GREEN

Non-Insulated Cable Ferrules




Part-no.	Wire size	L	ød1	ød2	øD	Part-no.	Wire size	L	ød1	ød2	øD
CN050060	0.5 mm ²	6 mm	1 mm	1.3 mm	2.1 mm	CN101120	10 mm ²	12 mm	4.5 mm	4.9 mm	5.8 mm
CN050080	0.5 mm ²	8 mm	1 mm	1.3 mm	2.1 mm	CN101150	10 mm ²	15 mm	4.5 mm	4.9 mm	5.8 mm
CN050100	0.5 mm ²	10 mm	1 mm	1.3 mm	2.1 mm	CN101180	10 mm ²	18 mm	4.5 mm	4.9 mm	5.8 mm
CN075060	0.75 mm ²	6 mm	1.2 mm	1.5 mm	2.3 mm	CN161120	16 mm ²	12 mm	5.8 mm	6.2 mm	7.5 mm
CN075080	0.75 mm ²	8 mm	1.2 mm	1.5 mm	2.3 mm	CN161150	16 mm ²	15 mm	5.8 mm	6.2 mm	7.5 mm
CN075100	0.75 mm ²	10 mm	1.2 mm	1.5 mm	2.3 mm	CN161180	16 mm ²	18 mm	5.8 mm	6.2 mm	7.5 mm
CN100060	1.0 mm ²	6 mm	1.4 mm	1.7 mm	2.5 mm	CN251150	25 mm ²	15 mm	7.3 mm	7.7 mm	9.5 mm
CN100080	1.0 mm ²	8 mm	1.4 mm	1.7 mm	2.5 mm	CN251160	25 mm ²	16 mm	7.3 mm	7.7 mm	9.5 mm
CN100100	1.0 mm ²	10 mm	1.4 mm	1.7 mm	2.5 mm	CN251180	25 mm ²	18 mm	7.3 mm	7.7 mm	9.5 mm
CN100120	1.0 mm ²	12 mm	1.4 mm	1.7 mm	2.5 mm	CN251250	25 mm ²	25 mm	7.3 mm	7.7 mm	9.5 mm
CN150070	1.5 mm ²	7 mm	1.7 mm	2.0 mm	2.8 mm	CN351160	35 mm ²	16 mm	8.3 mm	8.7 mm	11 mm
CN150080	1.5 mm ²	8 mm	1.7 mm	2.0 mm	2.8 mm	CN351190	35 mm ²	19 mm	8.3 mm	8.7 mm	11 mm
CN150100	1.5 mm ²	10 mm	1.7 mm	2.0 mm	2.8 mm	CN351200	35 mm ²	20 mm	8.3 mm	8.7 mm	11 mm
CN150120	1.5 mm ²	12 mm	1.7 mm	2.0 mm	2.8 mm	CN351250	35 mm ²	25 mm	8.3 mm	8.7 mm	11 mm
CN250070	2.5 mm ²	7 mm	2.2 mm	2.5 mm	3.4 mm	CN501190	50 mm ²	19 mm	10.3 mm	10.9 mm	13 mm
CN250080	2.5 mm ²	8 mm	2.2 mm	2.5 mm	3.4 mm	CN501200	50 mm ²	20 mm	10.3 mm	10.9 mm	13 mm
CN250100	2.5 mm ²	10 mm	2.2 mm	2.5 mm	3.4 mm	CN501250	50 mm ²	25 mm	10.3 mm	10.9 mm	13 mm
CN250120	2.5 mm ²	12 mm	2.2 mm	2.5 mm	3.4 mm	CN701220	70 mm ²	22 mm	13.5 mm	14.3 mm	15.3 mm
CN400080	4.0 mm ²	8 mm	2.8 mm	3.2 mm	4.0 mm	CN901250	90 mm ²	25 mm	13.5 mm	14.3 mm	15.3 mm
CN400090	4.0 mm ²	9 mm	2.8 mm	3.2 mm	4.0 mm	CN951250	95 mm ²	25 mm	14.7 mm	15.5 mm	16.6 mm
CN400100	4.0 mm ²	10 mm	2.8 mm	3.2 mm	4.0 mm	CN122300	120 mm ²	30 mm	16.7 mm	17.6 mm	18.6 mm
CN400120	4.0 mm ²	12 mm	2.8 mm	3.2 mm	4.0 mm	CN122320	120 mm ²	32 mm	16.7 mm	17.6 mm	18.6 mm
CN400150	4.0 mm ²	15 mm	2.8 mm	3.2 mm	4.0 mm	CN122340	120 mm ²	34 mm	16.7 mm	17.6 mm	18.6 mm
CN400180	4.0 mm ²	18 mm	2.8 mm	3.2 mm	4.0 mm	CN152320	150 mm ²	32 mm	19.5 mm	20.5 mm	21.5 mm
CN600100	6.0 mm ²	10 mm	3.5 mm	3.9 mm	4.7 mm	CN152380	150 mm ²	38 mm	19.5 mm	20.5 mm	21.5 mm
CN600120	6.0 mm ²	12 mm	3.5 mm	3.9 mm	4.7 mm						
CN600150	6.0 mm ²	15 mm	3.5 mm	3.9 mm	4.7 mm						
CN600180	6.0 mm ²	18 mm	3.5 mm	3.9 mm	4.7 mm						

Butt Splice Connector



Vinyl Insulated Butt Splice Connector


Insulation Material - Vinyl (PVC)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 75°C max.

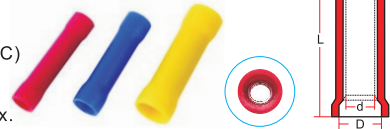

Part-no.	Wire size	ød	øD	L	color
BSV0525	0.5-1.5 mm ²	1.7 mm	4 mm	24.5 mm	Red
BSV1525	1.5-2.5 mm ²	2.3 mm	4.5 mm	24.5 mm	Blue
BSV4026	4.0-6.0 mm ²	3.4 mm	6.5 mm	26 mm	Yellow
BSV8036	8.0 mm ²	4.5 mm	8.5 mm	35.5 mm	Red
BSV1445	14 mm ²	5.9 mm	10.5 mm	45 mm	Blue
BSV2253	22 mm ²	7.8 mm	12.4 mm	52 mm	Yellow
BSV3855	38 mm ²	9.5 mm	15.5 mm	55 mm	Red

Non-Insulated Butt Splice Terminal


Material - Copper
Plating - Tin
Temperature rating - 150°C max.



Part-no.	Wire size	ød	øD	L
BS058017	0.5-1.5 mm ²	1.7 mm	3.3 mm	8 mm
BS158023	1.5-2.5 mm ²	2.3 mm	4 mm	8 mm
BS408534	4.0-6.0 mm ²	3.4 mm	5.5 mm	8.5 mm
BS1009545	10 mm ²	4.5 mm	7 mm	9.5 mm
BS1601158	16 mm ²	5.8 mm	8.9 mm	11 mm
BS2501477	25 mm ²	7.7 mm	11.3 mm	13.5 mm
BS3501794	35 mm ²	9.4 mm	13.2 mm	16.5 mm
BS5001912	50 mm ²	11.4 mm	15.4 mm	19 mm
BS7001914	70 mm ²	13.3 mm	17.5 mm	19 mm
BS9502015	95 mm ²	14.5 mm	19.4 mm	19.5 mm
BS12002017	120 mm ²	16.4 mm	22 mm	20 mm
BS15002720	150 mm ²	19.5 mm	26.4 mm	27 mm
BS18502922	185 mm ²	21.2 mm	28.5 mm	28.5 mm
BS24003224	240 mm ²	24 mm	32.2 mm	32 mm
BS30003728	300 mm ²	28 mm	37 mm	37 mm

Non-Insulated Parallel Splice Terminal

Material - Copper
Plating - Tin
Temperature rating - 105°C max.



Part-no.	Wire size	ød	øD	L
PS058017	0.5-1.5 mm ²	1.7 mm	3.3 mm	8 mm
PS158023	1.5-2.5 mm ²	2.3 mm	4 mm	8 mm
PS408534	4.0-6.0 mm ²	3.4 mm	5.5 mm	8.5 mm
PS1009545	10 mm ²	4.5 mm	7 mm	9.5 mm
PC1601158	16 mm ²	5.8 mm	8.9 mm	11 mm
PS2501477	25 mm ²	7.7 mm	11.3 mm	13.5 mm
PS3501794	35 mm ²	9.4 mm	13.2 mm	16.5 mm
PS5001912	50 mm ²	11.4 mm	15.4 mm	19 mm
PS7001924	70 mm ²	13.3 mm	17.5 mm	19 mm
PS9502015	95 mm ²	14.5 mm	19.4 mm	19.5 mm
PS12002017	120 mm ²	16.4 mm	22 mm	20 mm
PS15002720	150 mm ²	19.5 mm	26.4 mm	27 mm
PS18502922	185 mm ²	21.2 mm	28.5 mm	28.5 mm
PS24003224	240 mm ²	24 mm	32.2 mm	32 mm
PS30003728	300 mm ²	28 mm	37 mm	37 mm

Butt Splice Connectors

Nylon Insulated Butt Splice Connector

Insulation Material - Nylon (PA)
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 105°C max.



Part-no.	Wire size	ød	øD	L	color
BSN0525	0.5-1.5 mm ²	1.7 mm	4 mm	24.5 mm	Red
BSN1525	1.5-2.5 mm ²	2.3 mm	4.5 mm	24.5 mm	Blue
BSN4026	4.0-6.0 mm ²	3.4 mm	6.5 mm	26 mm	Yellow
BSN8036	8.0 mm ²	4.5 mm	8.5 mm	35.5 mm	Red
BSN1445	14 mm ²	5.9 mm	10.5 mm	45 mm	Blue
BSN2253	22 mm ²	7.8 mm	12.4 mm	52 mm	Yellow
BSN3855	38 mm ²	9.5 mm	15.5 mm	55 mm	Red

Seal Heat Shrink Insulated Butt Terminal Connector





Adhesive Lined Heat shrink Sleeve
Shrinking Ratio: 3:1
Insulation Material - HDPE
Terminal Material - Copper
Terminal Thickness - 1.0mm
Temperature rating - 150°C max.
Wire Range -
Clear: 22-16 A.W.G / 0.5-1.5mm²
Red: 22-16 A.W.G / 0.5-1.5mm²
Blue: 16-14 A.W.G / 1.5-2.5mm²
Yellow: 12-10 A.W.G / 4.0-6.0mm²

Part-no.	ød	øD	L	color
HSB0534TR NEW	1.7 mm	4 mm	33.3 mm	Clear
HSB0534	1.7 mm	4 mm	33.3 mm	Red
HSB1535	2.3 mm	5.5 mm	34.3 mm	Blue
HSB4041	3.4 mm	6.4 mm	41 mm	Yellow

Sealed Solder Heat Shrink Splice Insulated Terminal Connector

The Solder Heat Shrink Splice designed for connection of wires, soldered, insulated and sealed in one step, and does not require any crimp tool.

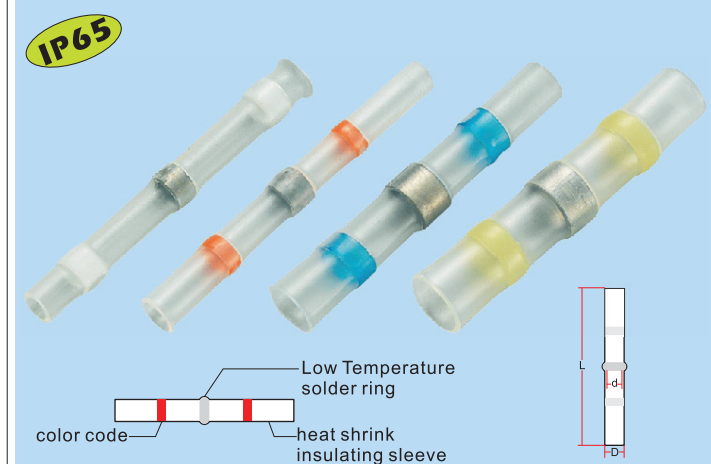

Part-no.	øD	ød	L	color code
JFST-1-W	2 mm	1.8 mm	25 mm	White
JFST-2-R	3.2 mm	2.9 mm	40 mm	Red
JFST-3-B	5 mm	4.6 mm	40 mm	Blue
JFST-4-Y	6.5 mm	6.2 mm	40 mm	Yellow

Insulated Spring Insert Screw-on Connector

Insulation Material - PA
Spring Material - Copper
Temperature rating - 105°C max.



Part-no.	color	suitable (min.)	suitable(max.)
WNSP1GY	Grey	1x0.75mm ² w/ 1x0.5mm ²	2x1.5mm ²
WNSP2BL	Blue	3x0.75mm ²	3x1.5mm ²
WNSP3OR	Orange	3x0.75mm ²	3x1.5mm ² w/ 1x1mm ²
WNSP4YL	Yellow	1x0.25mm ² w/ 1x0.75mm ²	4x2.5mm ² w/ 1x0.75mm ²
WNSP6RD	Red	2x0.25mm ²	4x6mm ² w/ 2x4mm ²


Winged Type

Insulation Material - PA
Terminal Material - Copper
Temperature rating - 75°C max.
Wire Range - 16-14 A.W.G / 1.5-2.5mm²



Part-no.	color	suitable (min.)	suitable(max.)
WNSPL1YL	Yellow	2x18mm ²	3x12mm ²
WNSPL2RD	Red	2x14mm ²	4x10mm ²

Lock Joint Connector

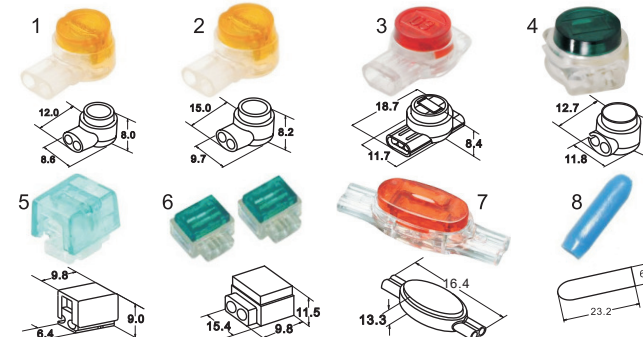

Part-no.	max. wire dia.	conductor dia.	circuit
LJWC01	1.52 mm	0.4 - 0.7 mm	
LJWC02	1.52 mm	0.4 - 0.7 mm	
LJWC03	1.67 mm	0.4 - 0.9 mm	
LJWC04	1.67 mm	0.4 - 0.9 mm	
LJWC05	1.27 mm	0.4 - 0.7 mm	
LJWC06	2.3 mm	1.2 mm	
LJWC07	2.0-3.3 mm	1.2-1.5 mm	
LJWC08	1.27 mm	0.32 - 0.7 mm	

Wire End Cap



Insulation Material - Nylon
Terminal Material - Copper / Alu.
Temperature rating - 105°C max.

Part-no.	øD1	øD	L	wire size
CT2818	2.8 mm	9 mm	18 mm	1.25 mm ²
CT3021	3 mm	9.5 mm	21 mm	2 mm ²
CT4023	4 mm	10.5 mm	22.5 mm	4 mm ²
CT4824	4.8 mm	12 mm	24 mm	8 mm ²
CT5526	5.5 mm	13 mm	25.5 mm	10 mm ²
CT6026	6 mm	14 mm	25.5 mm	13 mm ²
CT7830	7.8 mm	15.5 mm	29.5 mm	16 mm ²


Insulated Splicing Connectors

Insulated Splicing Connector

Quick Splice Connector

Self-Stripping

Insulation Material - PP
Terminal Material - Brass

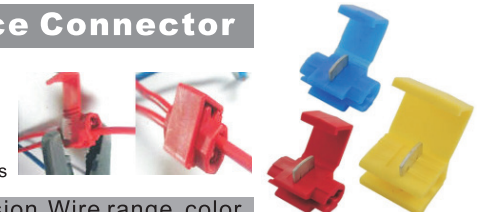

Part-no.	Dimension	Wire range	color
FS2026RD	20 x 26 mm	0.5-1.0 mm ²	Red
FS2026WT	20 x 26 mm	0.75-2.5 mm ²	White
FS2026BL	20 x 26 mm	0.75-2.5 mm ²	Blue
FS2126YL	21 x 26 mm	4.0-6.0 mm ²	Yellow


Quick Splice Connector

Insulation Material - PP
Terminal Material - Brass



Part-no.	Dimension	Wire range	color
FS1038RD	10 x 38 mm	0.5-1.5 mm ²	Red
FS1038BL	10 x 38 mm	1.5-2.5 mm ²	Blue
FS1038YL	10 x 38 mm	4.0-6.0 mm ²	Yellow

Quick Splicing Connector



Part-no.	Dimension	Wire range
910012	29 x 9.5 x 11.3 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910001	33.4 x 12.4 x 11.3 mm	0.75-1.0 mm ²

Part-no.	Dimension	Wire range
910016	44.4 x 16 x 16 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910017	24 x 27.2 x 11.3 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910018	24 x 27.2 x 11.3 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910019	24 x 14 x 11.3 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910020	44.4 x 23.3 x 16 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910035	24 x 21.9 x 11.3 mm	1.5-2.5 mm ²

Part-no.	Dimension	Wire range
910037	20 x 15.5 x 12.3 mm	0.5-1.5 mm ²

Part-no.	Dimension	Wire range
910050	18.4 x 29.4 x 9.8 mm	4 mm ²