
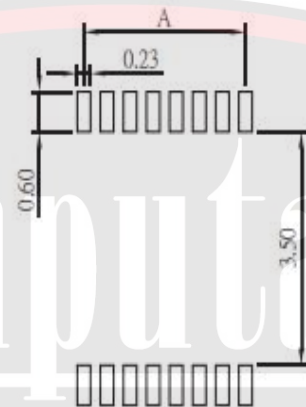
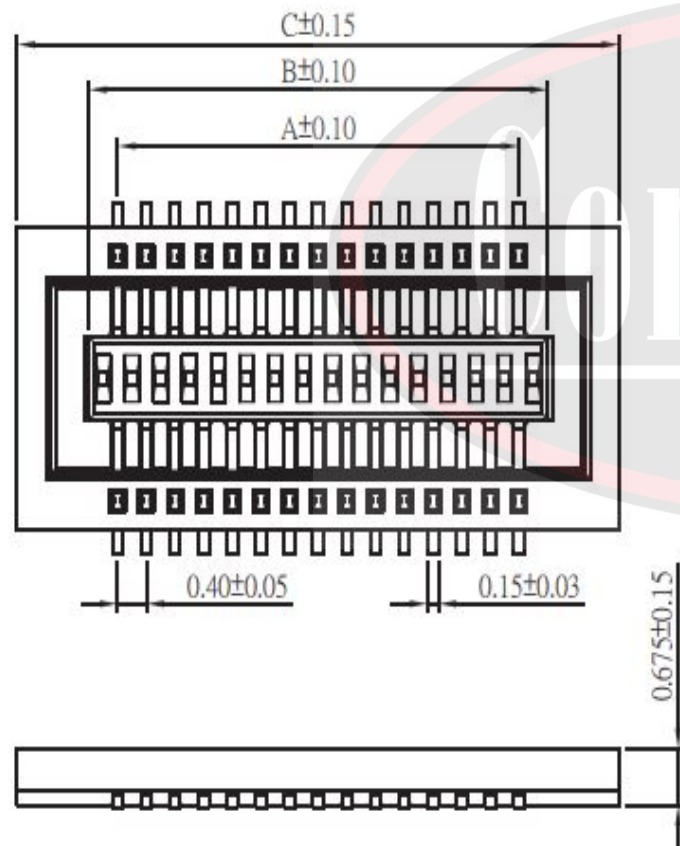



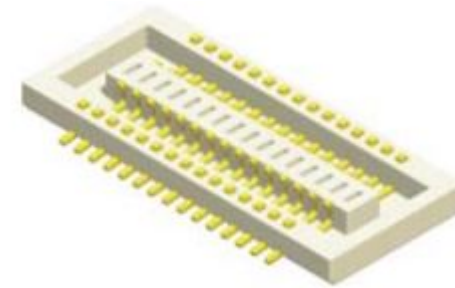


Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

No. of Contacts	Dim. A	Dim. B	Dim. C	No. of Contacts	Dim. A	Dim. B	Dim. C
10	1.60	2.40	4.40	46	8.80	9.60	11.60
12	2.00	2.80	4.80	48	9.20	10.00	12.00
14	2.40	3.20	5.20	50	9.60	10.40	12.40
16	2.80	3.60	5.60	52	10.00	10.80	12.80
18	3.20	4.00	6.00	54	10.40	11.20	13.20
20	3.60	4.40	6.40	56	10.80	11.60	13.60
22	4.00	4.80	6.80	58	11.20	12.00	14.00
24	4.40	5.20	7.20	60	11.60	12.40	14.40
26	4.80	5.60	7.60	62	12.00	12.80	14.80
28	5.20	6.00	8.00	64	12.40	13.20	15.20
30	5.60	6.40	8.40	66	12.80	13.60	15.60
32	6.00	6.80	8.80	68	13.20	14.00	16.00
34	6.40	7.20	9.20	70	13.60	14.40	16.40
36	6.80	7.60	9.60	72	14.00	14.80	16.80
38	7.20	8.00	10.00	74	14.40	15.20	17.20
40	7.60	8.40	10.40	76	14.80	15.60	17.60
42	8.00	8.80	10.80	78	15.20	16.00	18.00
44	8.40	9.20	11.20	80	15.60	16.40	18.40

©After Mating Height

MALE
FEMALE 0.90

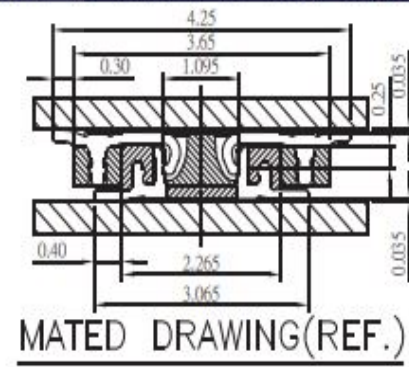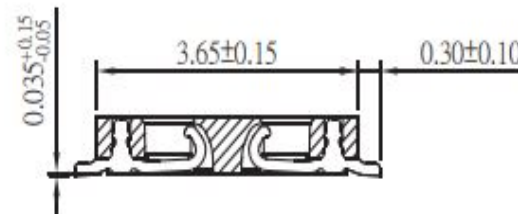

MATED DRAWING(REF.)

**Computace Electronic
Company Limited**
info@computace.com
www.computace.com

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE $\pm 1^\circ$
RADIUS ± 0.25
HOLE ± 0.13

DRAWN: Luis Wong

CHECKED: Miko Li

APPROVED: Jade Xu

DATE: 11/12/2018

DATE: 12/12/2018

DATE: 14/12/2018

UNIT: mm

SIZE: A4

SCALE: 4/1

PART NUMBER : 517-7-T-XX-M-XX

PRODUCT TITLE: 0.4mm Male Board-to-Board connector
H= 0.675mm

DRAWING NUMBER